

Digital Mirroring (DMR)



HDMI Digital/Analog-Wandler

- zur Übertragung von Bildern, Musik, Videos vom Mobilgerät über Lightning-Adapter / mobile Endgeräte mit HDMI-Ausgang auf die Bordanlage im Bus
- USB Ausführung Ladebuchse 2,14 Amp.

Achtung: Für Mobilgeräte mit Mobile High-Definition

Link (MHL) Schnittstelle = Übertragung von Audio- und Videodaten von einem Mobilgerät (Smartphone, Tablet) auf einen Bildschirm

DMB – Digital Mirroring Box HW Specification

Operating Supply Voltage	14V – 50V
Operating Supply Current	nominal 0.5A, (max. 1A)
Standby Supply Current	Less than 0.1 mA
Operating Temperature Range	-10 .. +80 C



Video Input Connector	HDMI
Video Input Format	max. 1080p
Video Output Connector	RCA Cinch (color coded)
Video Output Format	Composite PAL
Audio Output Connector	RCA Cinch (color coded)
Audio Output	Stereo, Microphone level

USB Output Voltage	5V
USB Output Current	Max. 2.15A

Certifications:	E13 10R - 05 14575
-----------------	--------------------

Dimensions	110mm x 20mm x 60mm (W x H x D)
------------	---------------------------------

Electrical Pinout

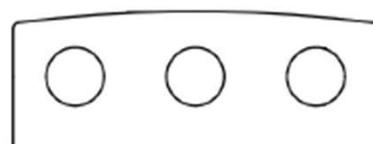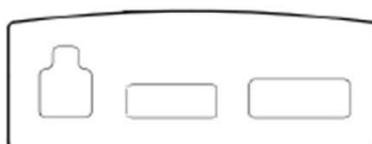

POWER IN	
1	Battery In
2	Not Connected
3	GND
4	Not Connected